
SGS Dental
Swiss Implant System

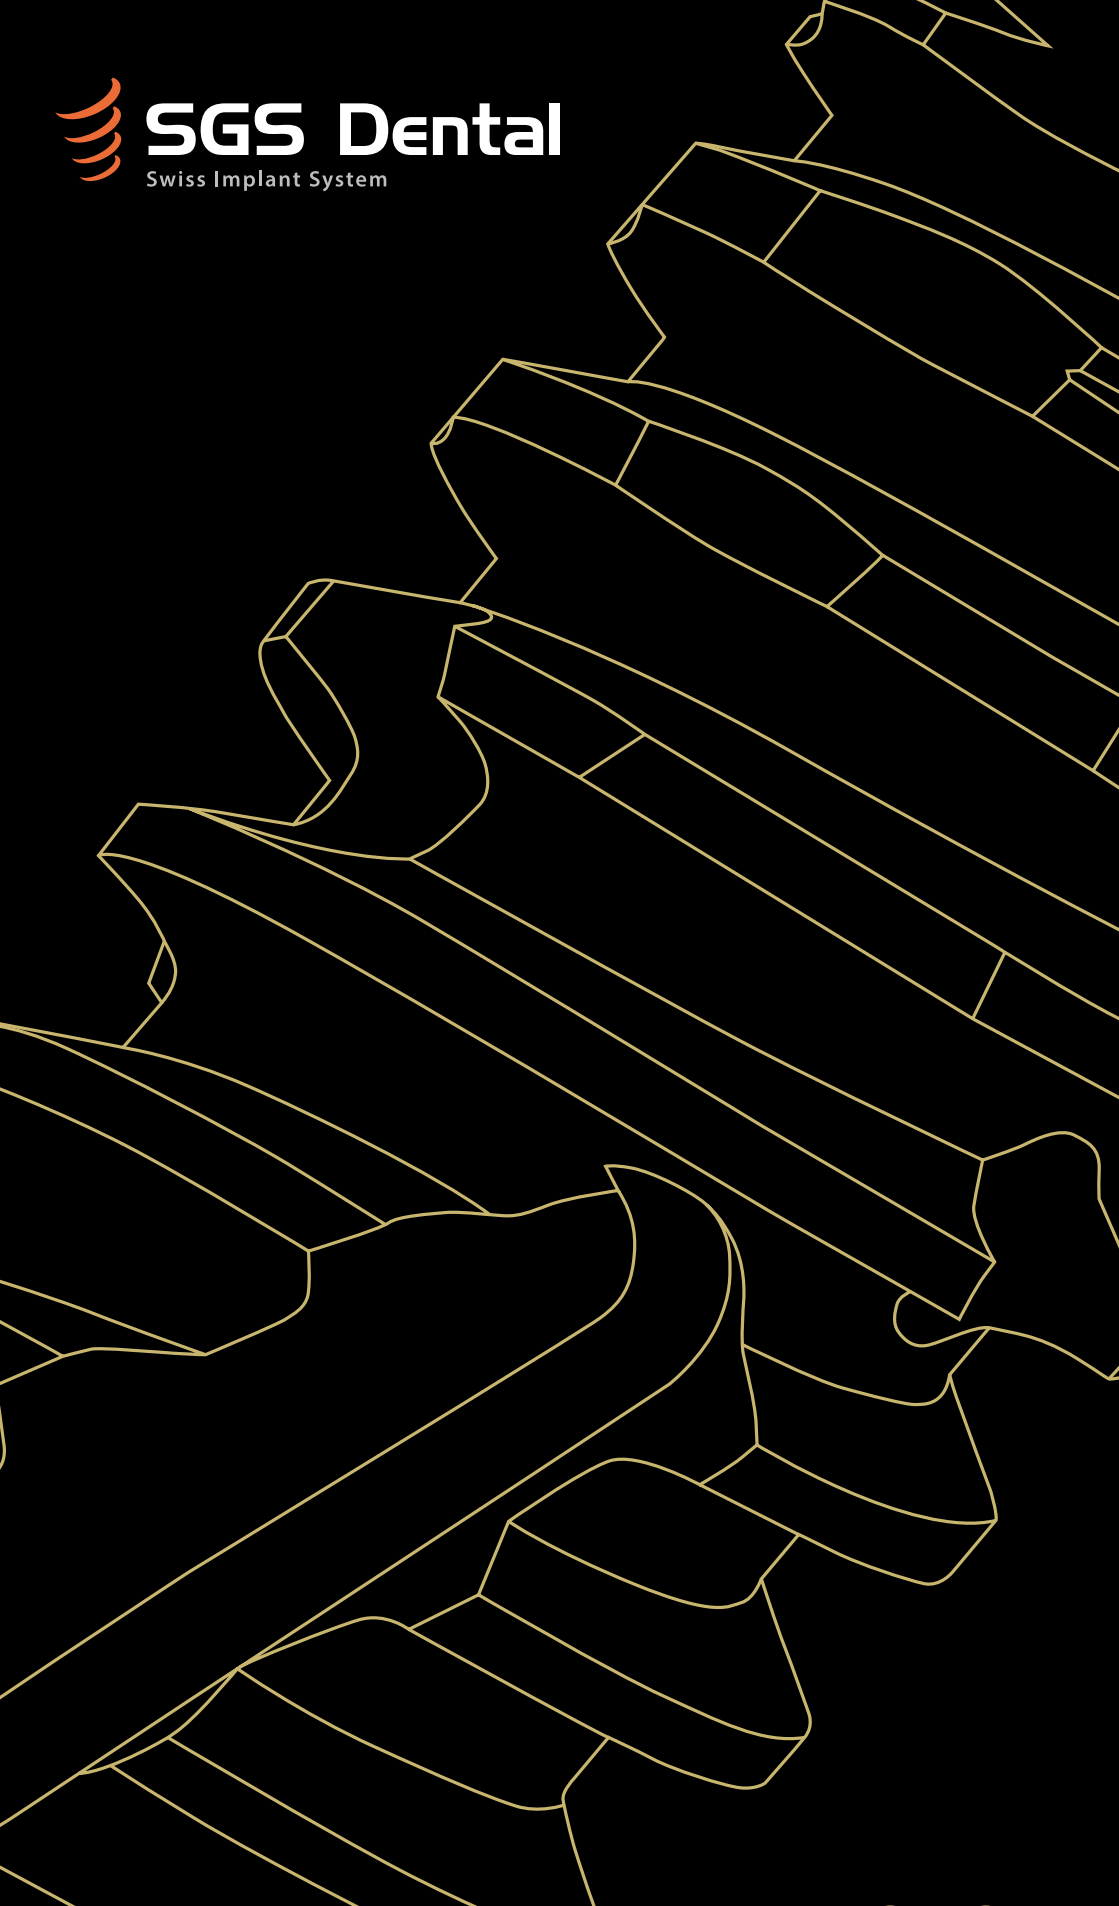

PRODUCT OVERVIEW

ENG / 230717

SGS Dental
Swiss Implant System

SGS Dental Implant System Holding

is based in St. Gallen, Switzerland with aim to offer the customers a comprehensive range of innovative, science-based dental solutions. SGS Dental Implant System is not only a dental product, but it is about art and experience in clinical practice as well.
Thanks to qualitative Swiss technology, SGS Dental Implant System provides excellent products at competitive prices with strong support. We use the most precise tools and equipment with the best raw materials, that is why SGS became one of market leaders in the dental implant industry. Our system is used by thousands of professionals all around the world.

Implantology
SGS Dental

TABLE OF CONTENTS

Dental Implants

Conical platform 8
Narrow Conical platform 9
Internal Hexagon - Platform 3.75 10
One-Piece platform 11

Conical Platform

Healing caps 12
Open tray transfers 12
Closed tray transfers 13
Analog / Implant analog 13
Checking kit 14
Individual abutments 14
Flat connection 15
Temporary restoration 15
Straight abutments 15
Angular abutments 16
Anatomic angular abutments 16
Zirconium abutments 18
Temporary (peek) abutments 18
Abutments for bars 18
Abutments for immediate loading 19
Easy-Fix for immediate loading 19
Multi-Units for immediate loading 19
The-ONE multi-unit abutments 20
Overdenture-ball attachments 20
Overdenture S-Lock Abutments 21
Overdenture Smart-Lock abutments 21
Overdenture Easy-Fix abutments 21

Narrow Conical Platform

Healing caps 22
Open tray transfers 22
Closed tray transfers 22
Analog / Implant analog 22
Checking kit 23
Individual abutments 23
Flat connection 23
Temporary restoration 23
Straight abutments 24
Angular abutments 24
Zirconium abutments 24
Temporary (peek) abutments 26
Abutments for bars 26
Easy-Fix for immediate loading 26
Multi-Units for immediate loading 27
Overdenture-ball attachments 27
Overdenture S-Lock abutments 28
Overdenture Smart-Lock abutments 28

Internal Hexagon - Platform 3.75

Healing caps 30
Open tray transfers 30
Closed tray transfers 31
Analog / Implant analog 31
Checking kit 32
Individual abutments 32
Flat connection 33
Temporary restoration 33
Straight abutments 33
Angular abutments 34
Anatomic angular abutments 34
Zirconium abutments 36
Temporary (peek) abutments 36
Abutments for bars 36
Abutments for immediate loading 37
Easy-Fix for immediate loading 37
Multi-Units for immediate loading 37
The-ONE multi-unit abutments 38
Overdenture-ball attachments 38
Overdenture S-Lock abutments 39
Overdenture Smart-Lock abutments 39
Overdenture Easy-Fix abutments 39

One-piece Platform


Transfers 40
Analogs 40
Keys/Drivers 40

CAD - CAM

Platforms & description 42-43
Dynamic abutments 44-45
Milling abutments 46
Digital libraries 47

Surgical Kits

Basic kit & straight / spiral drill kit 48-51
Advanced kit & straight / spiral drill kit 52-53
Guided surgery kit 54-55
Prosthetic kit 56-57
Conical stopper drill kit 58-59
Other drills 59
Short drills 59

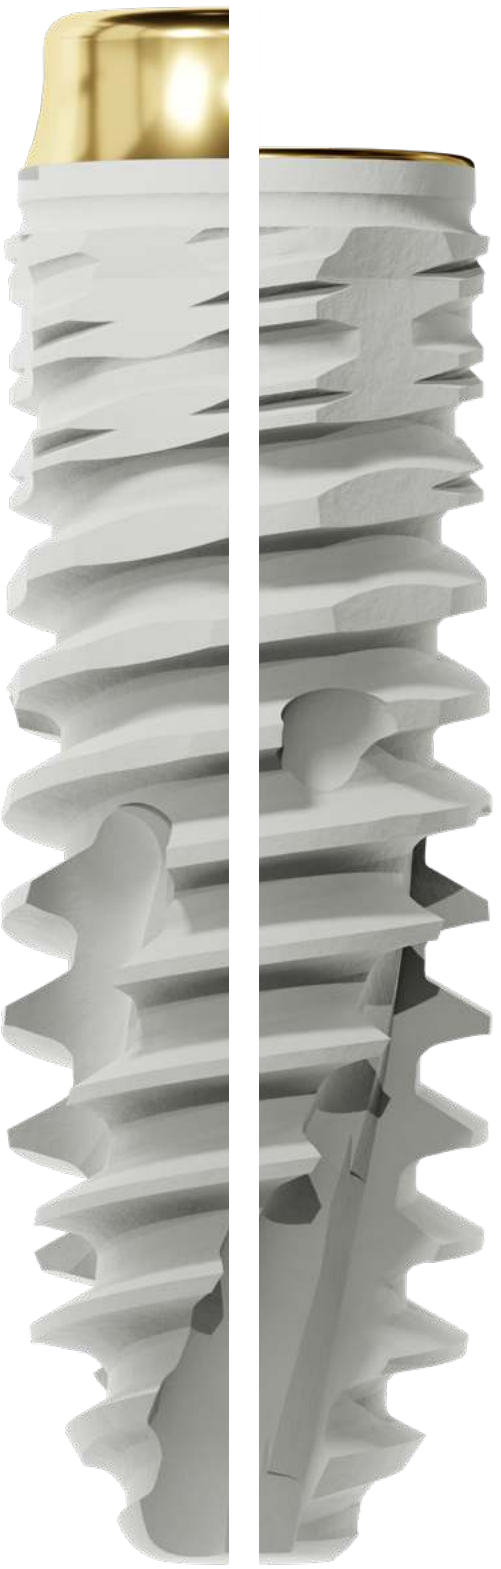

CONICAL
PLATFORM



COATING







CONICAL PLATFORM

P5D / P5G / P7D/ P1D

NARROW CONICAL PLATFORM

P7N

INTERNAL HEXAGON PLATFORM 3.75

P7 / P1

ONE-PIECE

P7S / P9S

P5D

NEW



Conical

–	–	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm
–	–	18 mm	–	–	–
		20 mm			
–	–	22 mm	–	–	–

P5G

NEW



Conical

–	–	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm
–	–	18 mm	–	–	–
		20 mm			
–	–	22 mm	–	–	–

P1D



Conical

Densely threaded Implant, extremely beneficial for Hard-Bone (mandibular, D1 & D2), with Shift Platform and Conical connection.

–	–	–	6 mm
8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm

P7D



Conical

Aggressively threaded Implant, beneficial for D3 and D4 bone types with high primer stability, with Shift Platform and Conical connection.

–	–	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

P7N



Narrow Conical

Slightly aggressively threaded Implant, beneficial for all bone types where space is scarce and a specialty solution is required, with Shift Platform and a Narrow Conical connection.

–	8 mm
10 mm	10 mm
11.5 mm	11.5 mm
13 mm	13 mm
16 mm	16 mm

P1



Internal Hexagon

Densely threaded Implant, extremely beneficial for Hard-Bone (mandibular, D1 & D2), with Internal Hexagon connection.

–	–	–	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm

P7



Internal Hexagon

Aggressively threaded Implant, beneficial for D3 and D4 bone types with high primer stability, with Internal Hexagon connection.

–	–	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

NEW

P7S

One-piece



–	–	–	–	6 mm	6 mm
	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

NEW


P9S

One-piece



–	–	–	–	–	6 mm
	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

HEALING CAPS //


	Product code	Available sizes	Additional info/parts
	**HAD** Healing cap	**1 mm (Ref: D10471)** 2 mm (Ref: D10472) 3 mm (Ref: D10473) 4 mm (Ref: D10474) 5 mm (Ref: D10475) 6 mm (Ref: D10476)	Suitable for all implant diameters.
	**HWD** Wide healing cap	3 mm (Ref: D10583) 5 mm (Ref: D10585)	WIDE Suitable for all implant diameters.
	**HW7D** Wide healing cap	3 mm (Ref: D10703) 5 mm (Ref: D10705)	WIDE Suitable for all implant diameters.
	**HW8D** Wide healing cap	3 mm (Ref: D10803) 5 mm (Ref: D10805)	WIDE Suitable for all implant diameters.
	**HND** Narrow healing cap	2 mm (Ref: D10382) 3 mm (Ref: D10383) 4 mm (Ref: D10384)	NARROW Suitable for all implant diameters.

OPEN TRAY TRANSFERS //

	Product code	Available sizes	Additional info/parts	
	**T1D** Transfer	15 mm (Ref: D7615)	–	
	**T5D** Transfer	11 mm (Ref: D7611)	SHORT	
	**T4D** Transfer	15 mm (Ref: D7615H)	SLIM	*
	**T6D** Transfer	11 mm (Ref: D7611S)	SLIM SHORT	*
	**T8D** Transfer	15 mm (Ref: D7615S)	SLIM	*

*** Dentists choose this product more often.**

CLOSED TRAY TRANSFERS //

Additional info/parts	Available sizes	Product code	
 SHORT	9 mm (Ref: D779)	**T1D** Transfer	
 SLIM SHORT	9 mm (Ref: D779S)	**T7D** Transfer	
 P-T3 Plastic transfer (Ref: M80) PM-T3 Plastic crown Immediate loading (Ref: M80a)  PMP-T3 Peek crown Immediate loading (Ref: M80b)	1 mm (Ref: D791) 2 mm (Ref: D792) 3 mm (Ref: D793) 4 mm (Ref: D794)	**T3D** Transfer	
 P-T3 Plastic transfer (Ref: M80) PM-T3 Plastic crown Immediate loading (Ref: M80a)  PMP-T3 Peek crown Immediate loading (Ref: M80b)	1 mm (Ref:D79201) 2 mm (Ref:D79202) 3 mm (Ref:D79203) NEW	**T3D, 20°** Transfer	

! Recommended tightening torque max. 10 Ncm for the screw.

ANALOG / IMPLANT ANALOG //

Additional info/parts	Available sizes	Product code	
Analog	12 mm (Ref: D08)	**A1D**	

CHECKING KIT //

Product code	Available sizes	Additional info/parts
CKD	(Ref: D81)	position checking tool - **0°**
CKD - 15°	(Ref: D8115)	position checking tool - **15°**
CKD - 25°	(Ref: D8125)	position checking tool - **25°**
CKD - 35°	(Ref: D8135)	position checking tool - **35°**
CKD - 45°	(Ref: D8145)	position checking tool - **45°**

FLAT CONNECTION //

Additional info/parts	Available sizes	Product code
Screw included * : *Titanium*	○ 15 mm (Ref: D28) FLAT NEW	**S15D - T**

Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

TEMPORARY RESTORATION //

Additional info/parts	Available sizes	Product code
Screw included * : *Titanium*	⬡ 15 mm (Ref: D29) NEW	**S15D - TH** Abutment for immediate loading

Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

INDIVIDUAL ABUTMENTS //

Product code	Available sizes	Additional info/parts
S1PNHD Abutment for casting	⬡ 11 mm (Ref: D82)	Two screws included * :
S1PND Abutment for casting	○ 11 mm (Ref: D81)	Two screws included * :
S1PTD Abutment for casting	⬡ 11 mm (Ref: D83)	Two screws included * : *Plastic/Titanium*
S1PCD Abutment for casting	○ 11 mm (Ref: D84)	Two screws included * : *Plastic/Chrome-cobalt*
S1PCHD Abutment for casting	⬡ 11 mm (Ref: D85)	Two screws included * : *Plastic/Chrome-cobalt*

Recommended tightening torque max. 25 Ncm for the screw.
* Gold screw for the final restoration, silver screw is suitable for the laboratory.

STRAIGHT ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * :	5 mm (Ref: D115) 7 mm (Ref: D117) 9 mm (Ref: D119) 12 mm (Ref: D1112) 15 mm (Ref: D1115)	**S1D** Straight abutment
Two screws included * :	1 mm (Ref: D121) 2 mm (Ref: D122) 3 mm (Ref: D123) 4 mm (Ref: D124)	**S1AD** Anatomic straight abutment
NARROW Two screws included * :	7 mm (Ref: D11N7) 9 mm (Ref: D11N9)	**S1ND** Straight narrow abutment
WIDE Two screws included * :	9 mm (Ref: D11W9) 12 mm (Ref: D11W12)	**S1WD** Straight wide abutment
WIDE Two screws included * :	10 mm (Ref: D11WW10)	**S1W8D** Straight wide abutment

Recommended tightening torque max. 25 Ncm for the screw.
* Gold screw for the final restoration, silver screw is suitable for the laboratory.

ANGULAR ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S2D - 15°** Angular abutment	11 mm (Ref: D131511)	Two screws included * : 
 **S2LD - 15°** Angular abutment	15 mm (Ref: D131515)	LONG Two screws included * : 
 **S2DS - 15°** Angular abutment	15 mm (Ref: D141515)	SLIM Two screws included * : 
 **S2D - 25°** Angular abutment	11 mm (Ref: D132511)	Two screws included * : 
 **S2LD - 25°** Angular abutment	15 mm (Ref: D132515)	Two screws included * : 
 **S2DS - 25°** Angular abutment	15 mm (Ref: D142515)	SLIM Two screws included * : 
 **S2D - 35°** Angular abutment	13 mm (Ref: D133513)	Two screws included * : 
 **S2D - 45°** Angular abutment	13 mm (Ref: D134513)	Two screws included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Gold screw for the final restoration, silver screw is suitable for the laboratory.

ANATOMIC ANGULAR ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S2AD - 15°** Anatomic angular abutment	1 mm (Ref: D15151) 2 mm (Ref: D15152) 3 mm (Ref: D15153) 4 mm (Ref: D15154)	Two screws included * : 
 **S2AD - 25°** Anatomic angular abutment	1 mm (Ref: D15251) 2 mm (Ref: D15252) 3 mm (Ref: D15253) 4 mm (Ref: D15254)	Two screws included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Gold screw for the final restoration, silver screw is suitable for the laboratory.

WHY CHOOSE SGS DENTAL SYSTEM?

PREMIUM SURFACE

A new microstructured bioactive antibacterial surface for implants! SBTC is a known worldwide type of dental implant coating, having outstanding performances in dental implantation practice.

ZIRCONIUM ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S1AZTD** Zirconium abutment	1 mm (Ref: D161T) 2 mm (Ref: D162T) 3 mm (Ref: D163T)	Screw included * : 
 **S2AZTD - 15°** Zirconium abutment	1 mm (Ref: D17151T) 2 mm (Ref: D17152T) 3 mm (Ref: D17153T)	Screw included * : 
 **S2AZTD - 25°** Zirconium abutment	1 mm (Ref: D17251T) 2 mm (Ref: D17252T) 3 mm (Ref: D17253T)	Screw included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

TEMPORARY (PEEK) ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S1AD - Peek** Peek abutment	1 mm (Ref: D181) 2 mm (Ref: D182) 3 mm (Ref: D183)	Screw included * : 
 **S2AD - Peek - 15°** Peek abutment	1 mm (Ref: D19151) 2 mm (Ref: D19152) 3 mm (Ref: D19153)	Screw included * : 
 **S2AD - Peek - 25°** Peek abutment	1 mm (Ref: D19251) 2 mm (Ref: D19252) 3 mm (Ref: D19253)	Screw included * : 

Recommended tightening torque max. 20 Ncm for the screw.
* Screw for the final restoration.

ABUTMENTS FOR BARS //

Product code	Available sizes	Additional info/parts
 **S1TD** Abutment	**Package contains:** plastic without hex 0.5 mm (Ref: D8605) 1.5 mm (Ref: D8615) 2.5 mm (Ref: D8625) 3.5 mm (Ref: D8635)	 Optional: plastic with hex

Recommended tightening torque max. 25 Ncm for the screw.

ABUTMENTS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 **P-T3 Plastic transfer** (Ref: M80)	1 mm (Ref: D791) 2 mm (Ref: D792) 3 mm (Ref: D793) 4 mm (Ref: D794)	**T3D** Abutment
PM-T3 Plastic crown Immediate loading (Ref: M80a)		
 **PMP-T3 Peek crown Immediate loading** (Ref: M80b)	1 mm (Ref: D79201) 2 mm (Ref: D79202) 3 mm (Ref: D79203) NEW	**T3D, 20°** Abutment



T3D - Smart Solution: transfer / immediate loading or temporary loading abutment (Contains: 2 x T3D, P - , PMP - , PM-T3)

Recommended tightening torque max. 15 Ncm for the screw.

EASY-FIX FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 **T1-S4**  **TP-S4**  **H - S4**  **A1 - S4** **S4a - Plastic** (Ref: C83)  **S4a - Peek** (Ref: C84)	0.5 mm (Ref: D2605) 1.5 mm (Ref: D2615) 2.5 mm (Ref: D2625) 3.5 mm (Ref: D2635)	**S4D** Abutment
	1 mm (Ref: D32171/C43) 2 mm (Ref: D32172/C43) 3 mm (Ref: D32173/C43)	**S4 - S7D - 17°** Abutment
 **T-S4**  **P-S4**	1 mm (Ref: D32301/C43) 2 mm (Ref: D32302/C43) 3 mm (Ref: D32303/C43)	**S4 - S7D - 30°** Abutment



Recommended tightening torque max. 20 Ncm for the screw.

MULTI-UNITS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 **T1 - S6/S7** (Ref: C34)  **H - S6/S7** (Ref: C33)  **T - S6/S7** (Ref: C36)	0.5 mm (Ref: D3105) 1.5 mm (Ref: D3115) 2.5 mm (Ref: D3125) 3.5 mm (Ref: D3135)	**S6D** Straight multi-unit abutment
 **A1 - S6/S7** (Ref: C35)  **PH - S6/S7** (Ref: C37)  **P - S6/S7** (Ref: C38)	1 mm (Ref: D32171) 2 mm (Ref: D32172) 3 mm (Ref: D32173)	**S7D - 17°** Multi-base angular abutment
	1 mm (Ref: D32301) 2 mm (Ref: D32302) 3 mm (Ref: D32303)	**S7D - 30°** Multi-base angular abutment



Recommended tightening torque max. 20 Ncm for the screw.

THE-ONE MULTI-UNIT ABUTMENTS //

Product code	Available sizes	Additional info/parts
S16DS Multi-unit abutment	1 mm (Ref: D641) 2 mm (Ref: D642) 3 mm (Ref: D643) 4 mm (Ref: D644) 5 mm (Ref: D645)	Closed tray: **T3 - S16S/S17S** (Ref: C72); **H - S16S/S17S** (Ref: C66); **T - S16S/S17S** (Ref: C69) (Ref: C95); **TW - S16S/S17S** (Ref: C73); **P - S16S/S17S** (Ref: C71); **PH - S16S/S17S** (Ref: C85) Open tray: **T1 - S16S/S17S** (Ref: C76); **A1 - S16S/S17S** (Ref: C68)
S17DS - 17° Multi-unit abutment	1 mm (Ref: D65171) 2 mm (Ref: D65172) 3 mm (Ref: D65173) 4 mm (Ref: D65174) 5 mm (Ref: D65175)	
S17DS - 30° Multi-unit abutment	1 mm (Ref: D65301) 2 mm (Ref: D65302) 3 mm (Ref: D65303) 4 mm (Ref: D65304) 5 mm (Ref: D65305)	
S17DS - 45° Multi-unit abutment	1 mm (Ref: D65451) 2 mm (Ref: D65452) 3 mm (Ref: D65453) 4 mm (Ref: D65454) 5 mm (Ref: D65455)	

Recommended tightening torque max. 20 Ncm for the screw. !

OVERDENTURE - BALL ATTACHMENTS //

Product code	Available sizes	Additional info/parts
S3D Ball-attachment	1 mm (Ref: D201) 2 mm (Ref: D202) 3 mm (Ref: D203) 4 mm (Ref: D204) 5 mm (Ref: D205) 6 mm (Ref: D206)	**S3D Package contains:** Metal cap (Ref: C21); Standard silicone (Ref:C23); Protective Disk (Ref: C122)
S3 - S7D - 17° Ball-attachment	1 mm (Ref: D32171/C4205) 2 mm (Ref: D32172/C4205) 3 mm (Ref: D32173/C4205)	**S3-S7D Package contains:** Metal cap (Ref: C21); Standard silicone (Ref:C23); Protective Disk (Ref: C122); Ball 0.5mm (Ref: C4205) **Optional:** Hard silicone (Ref: C22); Standard silicone (Ref: C23); Soft silicone (Ref: C24); Ball 1mm (Ref: C421); Ball 2mm (Ref: C422); Transfer **T1-S3** (Ref: C27); Analog **A1-S3** (Ref: C60)
S3 - S7D - 30° Ball-attachment	1 mm (Ref: D32301/C4205) 2 mm (Ref: D32302/C4205) 3 mm (Ref: D32303/C4205)	

Recommended tightening torque max. 25 Ncm for the screw. !

OVERDENTURE S-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code
Package contains: Metal cap (Ref: C116); Laboratory (Ref: C117); Extra soft (Ref: C118); Soft (Ref: C119); Standard (Ref: C120); Strong (Ref: C121); Protective Disk (Ref: C122) **Optional:** Transfer **T1-S35** (Ref: C114); Analog **A1-S35** (Ref: C115) **K21 Hand tool** (Ref: B21)	1 mm (Ref: D1121) 2 mm (Ref: D1122) 3 mm (Ref: D1123) 4 mm (Ref: D1124) 5 mm (Ref: D1125) 6 mm (Ref: D1126)	**S35D** Abutment
	1 mm (Ref: D32171/C113) 2 mm (Ref: D32172/C113) 3 mm (Ref: D32173/C113)	**S35 - S7D - 17°** Abutment
	1 mm (Ref: D32301/C113) 2 mm (Ref: D32302/C113) 3 mm (Ref: D32303/C113)	**S35 - S7D - 30°** Abutment

! Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE SMART-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code
K4 (Ref: C56) △ Transfer **T1-S8** (Ref: C48) Analog **A1-S8** (Ref: C49) **Magic Tool** (Ref: C55) **Straight package:** Metal cap (Ref: C50); Laboratory (Ref: C54); Hard (Ref: C51); Medium (Ref: C52); Soft (Ref: C53); Protective Disk (Ref: C122) **Angular package:** Metal cap (Ref: C50); Laboratory (Ref: C54); Hard (Ref: C51b); Medium (Ref: C52); Soft (Ref: C53); Protective Disk (Ref: C122)	1 mm (Ref: D451) 2 mm (Ref: D452) 3 mm (Ref: D453) 4 mm (Ref: D454) 5 mm (Ref: D455) 6 mm (Ref: D456)	**S8D** Abutment
	1.5 mm (Ref: D461515) 3 mm (Ref: D46153)	**S8D - 15°** Abutment



! Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE EASY-FIX ABUTMENTS //

Additional info/parts	Available sizes	Product code
Straight package: Metal cap (Ref: C50); Laboratory (Ref: C54); Medium (Ref: C52); Protective Disk (Ref: C122)	1 mm (Ref: D571) 2 mm (Ref: D572) 3 mm (Ref: D573) 4 mm (Ref: D574) 5 mm (Ref: D575) 6 mm (Ref: D576)	**S5D** Abutment
Angular package: Metal cap (Ref: C50); Laboratory (Ref: C54); Hard (Ref: C51b); Soft (Ref: C53); Protective Disk (Ref: C122) **S5 - S7** 1 mm (Ref: C441) 2 mm (Ref: C442) **Optional:** Transfer **T1-S5** (Ref: C58); Analog **A1-S5** (Ref: C59)	1 mm (Ref: D32171/C441) 2 mm (Ref: D32172/C441) 3 mm (Ref: D32173/C441)	**S5 - S7D - 17°** Abutment
	1 mm (Ref: D32301/C441) 2 mm (Ref: D32302/C441) 3 mm (Ref: D32303/C441)	**S5 - S7D - 30°** Abutment

! Recommended tightening torque max. 20 Ncm for the screw.

HEALING CAPS //

Product code	Available sizes	Additional info/parts
 **HN - 2.1** Healing cap	2 mm (Ref: N10472) 3 mm (Ref: N10473) 4 mm (Ref: N10474)	–
 **HWN - 2.1** Wide healing cap	2 mm (Ref: N10582) 4 mm (Ref: N10584)	WIDE
 **HNN - 2.1** Narrow healing cap	2 mm (Ref: N10382) 4 mm (Ref: N10384)	NARROW

OPEN TRAY TRANSFERS //

Product code	Available sizes	Additional info/parts
 **T1N - 2.1** Transfer	15 mm (Ref: N76)	–

CLOSED TRAY TRANSFERS //

Product code	Available sizes	Additional info/parts
 **T3N - 2.1** Transfer	9 mm (Ref: N79)	 P-T3 Plastic transfer (Ref: M80) PM-T3 Plastic crown Immediate loading (Ref: M80a)  PMP-T3 Peek crown Immediate loading (Ref: M80b)
 **T2N - 2.1** Transfer	9 mm (Ref: N78)	–

Recommended tightening torque max. 10 Ncm for the screw. !

ANALOG / IMPLANT ANALOG //

Product code	Available sizes	Additional info/parts
 **A1N - 2.1**	10 mm (Ref: N08)	Analog

CHECKING KIT //

Additional info/parts	Available sizes	Product code
position checking tool - **0°**	(Ref: N81)	**CKN - 2.1**
position checking tool - **15°**	(Ref: N8115)	**CKN - 2.1, 15°**
position checking tool - **25°**	(Ref: N8125)	**CKN - 2.1, 25°**

INDIVIDUAL ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * : 	⬡ 10 mm (Ref: N82)	**S1PNHN - 2.1** Abutment for casting
Two screws included * : 	○ 10 mm (Ref: N81)	**S1PNN - 2.1** Abutment for casting
Two screws included * : ! *Plastic/Chrome-cobalt* 	⬡ 11 mm (Ref: N85)	**S1PCHN - 2.1** Abutment for casting
Two screws included * : ! *Plastic/Titanium* 	⬡ 11 mm (Ref: N83)	**S1PTN - 2.1** Abutment for casting

! **Recommended tightening torque max. 25 Ncm for the screw.**
* Green screw for the final restoration, silver screw is suitable for the laboratory.

FLAT CONNECTION //

Additional info/parts	Available sizes	Product code
Screw included * : ! *Titanium* 	○ 15 mm (Ref: N28) FLAT NEW	**S15N - 2.1 - T** Abutment for immediate loading

! **Recommended tightening torque max. 25 Ncm for the screw.**
* Screw for the final restoration.

TEMPORARY RESTORATION //

Additional info/parts	Available sizes	Product code
Screw included * : ! *Titanium* 	⬡ 15 mm (Ref: N29) NEW	**S15N - 2.1 - TH** Abutment for immediate loading

! **Recommended tightening torque max. 25 Ncm for the screw.**
* Screw for the final restoration.

STRAIGHT ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S1N - 2.1** Straight abutment	9 mm (Ref: N119)	Two screws included * : 
 **S1WN - 2.1** Straight wide abutment	9 mm (Ref: N11W9)	WIDE Two screws included * : 
 H **S1AN - 2.1** Anatomic straight abutment	1 mm (Ref: N121) 2 mm (Ref: N122)	Two screws included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Green screw for the final restoration, silver screw is suitable for the laboratory.

ANGULAR ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S2N - 2.1, 15°** Angular abutment	10 mm (Ref: N1315)	Two screws included * : 
 **S2N - 2.1, 25°** Angular abutment	10 mm (Ref: N1325)	Two screws included * : 
 H **S2AN - 2.1, 15°** Anatomic angular abutment	1 mm (Ref: N15151) 2 mm (Ref: N15152)	Two screws included * : 
 H **S2AN - 2.1, 25°** Anatomic angular abutment	1 mm (Ref: N15251) 2 mm (Ref: N15252)	Two screws included * : 


Recommended tightening torque max. 25 Ncm for the screw.
* Green screw for the final restoration, silver screw is suitable for the laboratory.

ZIRCONIUM ABUTMENTS //

Product code	Available sizes	Additional info/parts
 H **S1AZNT - 2.1** Zirconium abutment	1 mm (Ref: N161T) 2 mm (Ref: N162T)	Screw included * : 
 H **S2AZNT - 2.1 - 15°** Zirconium abutment	1 mm (Ref: N17151T) 2 mm (Ref: N17152T)	Screw included * : 
 H **S2AZNT - 2.1 - 25°** Zirconium abutment	1 mm (Ref: N17251T) 2 mm (Ref: N17252T)	Screw included * : 

Recommended tightening torque max. 20 Ncm for the screw.
* Screw for the final restoration.

WHY CHOOSE SGS DENTAL SYSTEM?

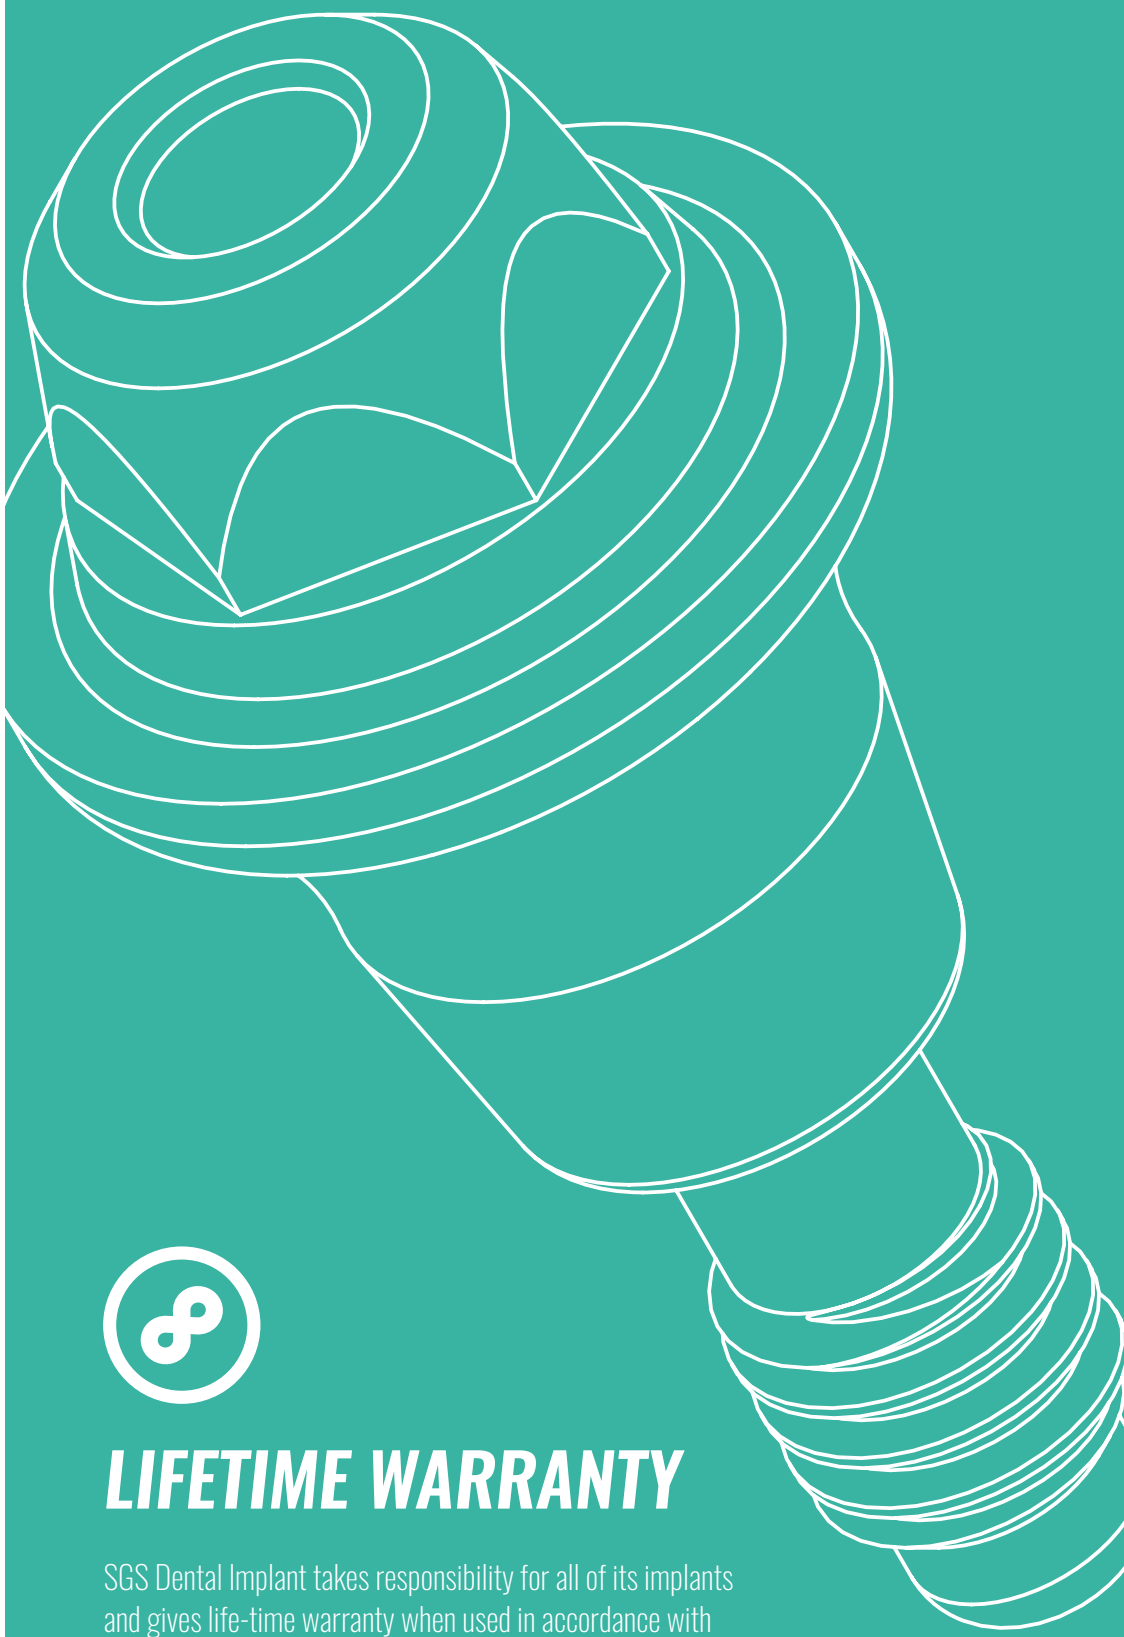

LIFETIME WARRANTY

SGS Dental Implant takes responsibility for all of its implants and gives life-time warranty when used in accordance with the supplied instructions for use and the company protocols.

TEMPORARY (PEEK) ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S1AN - Peek - 2.1** Peek abutment	1 mm (Ref: N181)	Screw included * : 
 **S2AN - Peek - 2.1, 15°** Peek abutment	1 mm (Ref: N19151)	Screw included * : 
 **S2AN - Peek - 2.1, 25°** Peek abutment	1 mm (Ref: N19251)	Screw included * : 

Recommended tightening torque max. 20 Ncm for the screw.
* Screw for the final restoration.

ABUTMENTS FOR BARS //

Product code	Available sizes	Additional info/parts
 **S1TN - 2.1** Abutment	**Package contains:** plastic without hex ⬡ 0.5 mm (Ref: N8605) 1.5 mm (Ref: N8615) 2.5 mm (Ref: N8625)	⬡  Optional: plastic with hex

Recommended tightening torque max. 25 Ncm for the screw.

EASY-FIX FOR IMMEDIATE LOADING //

Product code	Available sizes	Additional info/parts
 **S4N** Abutment	1 mm (Ref: N201) 2 mm (Ref: N202) 3 mm (Ref: N203) 4 mm (Ref: N204) 5 mm (Ref: N205) 6 mm (Ref: N206)	 **T1-S4**  **TP-S4**  **A1 - S4**  **H - S4**  **S4a - Plastic** (Ref: C83)  **S4a - Peek** (Ref: C84)
 **S4 - S7N -2.1-17°** Abutment	1 mm (Ref: N32171/C43) 2 mm (Ref: N32172/C43) 3 mm (Ref: N32173/C43)	
 **S4 - S7N -2.1-30°** Abutment	1.5 mm (Ref: N32301/C43) 2.5 mm (Ref: N32302/C43)	 **T-S4**  **P-S4**



Recommended tightening torque max. 25 Ncm for the screw.

MULTI-UNITS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 **T1 - S6/S7** (Ref: C34)  **H - S6/S7** (Ref: C33)	1 mm (Ref: N571) 2 mm (Ref: N572) 3 mm (Ref: N573) 4 mm (Ref: N574)	**S6N - 2.1** Abutment 
 **A1 - S6/S7** (Ref: C35)  **T - S6/S7** (Ref: C36)	1.5 mm (Ref: N321715/C40) 2.5 mm (Ref: N321725/C40)	**S7N - 2.1 - 17°** Abutment 
 **PH - S6/S7** (Ref: C37)  **P - S6/S7** (Ref: C38)	1.5 mm (Ref: N323015/C40) 2.5 mm (Ref: N323025/C40)	**S7N - 2.1 - 30°** Abutment 

Recommended tightening torque max. 25 Ncm for the screw.


OVERDENTURE - BALL ATTACHMENTS //

Additional info/parts	Available sizes	Product code
 **Package contains:** Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)  Ball 0.5mm (Ref: C4205)	1 mm (Ref: N201) 2 mm (Ref: N202) 3 mm (Ref: N203) 4 mm (Ref: N204)	**S3N - 2.1** Ball-attachment 
	1 mm (Ref: N20N1) 2 mm (Ref: N20N2) 3 mm (Ref: N20N3) 4 mm (Ref: N20N4)	**S3NN - 2.1** Ball-attachment 
Optional: Hard silicone (Ref: C22) Standard silicone (Ref: C23) Soft silicone (Ref: C24)  Ball 1mm (Ref: C421) Ball 2mm (Ref: C422)	1.5 mm (Ref: N20N171/ C4205) 2.5 mm (Ref: N20N172 C4205)	**S3 - S7N -2.1-17°** Ball-attachment 
 Transfer **T1-S3** (Ref: C27)  Analog **A1-S3** (Ref: C60)	1.5 mm (Ref: N20N301/ C4205) 2.5 mm (Ref: N20N302 C4205)	**S3 - S7N -2.1-30°** Ball-attachment 

Recommended tightening torque max. 25 Ncm for the screw.





OVERDENTURE S-LOCK ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S35N-2.1**	1 mm (Ref: N201) 2 mm (Ref: N202) 3 mm (Ref: N203)	 **Package contains:** Metal cap (Ref: C116) Laboratory (Ref: C117) Extra soft (Ref: C118) Soft (Ref: C119) Standard (Ref: C120) Strong (Ref: C121) Protective Disk (Ref: C122)
 **S35- S7N -2.1-17°** Abutment	1.5 mm (Ref: N32171/C113) 2.5 mm (Ref: N32172/C113)	**Optional:**  Transfer **T1-S35** (Ref: C114)  Analog **A1-S35** (Ref: C115) **K21 Hand tool** (Ref: B21)
 **S35 - S7N -2.1-30°** Abutment	1.5 mm (Ref: N32301/C113) 2.5 mm (Ref: N32302/C113)	

! **Recommended tightening torque max. 20 Ncm for the screw.**

OVERDENTURE SMART-LOCK ABUTMENTS //

Product code	Available sizes	Additional info/parts
 **S5N-2.1**	1 mm (Ref: D201) 2 mm (Ref: D202) 3 mm (Ref: D203)	 **Straight package:** Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52)
 **S5- S7N -2.1-17°** Abutment	1.5 mm (Ref: D32171/C4205) 2.5 mm (Ref: D32172/C4205)	 **Angular package:** Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Soft (Ref: C53)
 **S5 - S7N -2.1-30°** Abutment	1.5 mm (Ref: D32301/C4205) 2.5 mm (Ref: D32302/C4205)	**Optional:**  **S5 - S7** 1 mm (Ref: C441) 2 mm (Ref: C442)  Transfer **T1-S5** (Ref: C58)  Analog **A1-S5** (Ref: C59)

! **Recommended tightening torque max. 20 Ncm for the screw.**

WHY CHOOSE SGS DENTAL SYSTEM?

SUPERB HYDROPHILICITY

Thanks to SBTC hydrophilic surface bone and blood attraction accelerates. SBTC coating structure actively promotes osteoblasts bone formation.

HEALING CAPS //


	Product code	Available sizes	Additional info/parts
	**H - 3.75** Healing cap	**1 mm** (Ref: M10471) 2 mm (Ref: M10472) 3 mm (Ref: M10473) 4 mm (Ref: M10474) 5 mm (Ref: M10475) 6 mm (Ref: M10476)	Suitable for all implant diameters.
	**HW - 3.75** Wide healing cap	3 mm (Ref: M10583) 5 mm (Ref: M10585)	WIDE Suitable for all implant diameters.
	**HW7 - 3.75** Wide healing cap	3 mm (Ref: M10703) 5 mm (Ref: M10705)	WIDE Suitable for all implant diameters.
	**HW8 - 3.75** Wide healing cap	3 mm (Ref: M10803) 5 mm (Ref: M10805)	WIDE Suitable for all implant diameters.
	**HN - 3.75** Narrow healing cap	3 mm (Ref: M10383) 5 mm (Ref: M10385)	NARROW Suitable for all implant diameters.

OPEN TRAY TRANSFERS //

	Product code	Available sizes	Additional info/parts	
	**T1 - 3.75** Transfer	15 mm (Ref: M7615)	–	
	**T5 - 3.75** Transfer	11 mm (Ref: M7611)	SHORT	
	**T4 - 3.75** Transfer	15 mm (Ref: M7615H)	SLIM	*
	**T6 - 3.75** Transfer	11 mm (Ref: M7611S)	SLIM SHORT	*
	**T8 - 3.75** Transfer	15 mm (Ref: M7615S)	SLIM	*

*** Dentists choose this product more often.**

CLOSED TRAY TRANSFERS //

Additional info/parts	Available sizes	Product code	
 SHORT	9 mm (Ref: M779)	**T1 - 3.75** Transfer	
 SLIM SHORT	9 mm (Ref: M779S)	**T7 - 3.75** Transfer	
 **P-T3 Plastic transfer** (Ref: M80)	1 mm (Ref: M791) 2 mm (Ref: M792) 3 mm (Ref: M793) 4 mm (Ref: M794)	**T3 - 3.75** Transfer	
PM-T3 Plastic crown Immediate loading (Ref: M80a)			
 **PMP-T3 Peek crown Immediate loading** (Ref: M80b)	1 mm (Ref:M79201) 2 mm (Ref:M79202) 3 mm (Ref:M79203) NEW	**T3 - 3.75, 20°** Transfer	

! Recommended tightening torque max. 10 Ncm for the screw.

ANALOG / IMPLANT ANALOG //

Additional info/parts	Available sizes	Product code	
–	12 mm (Ref: M08)	**A1 - 3.75** Analog	



CHECKING KIT //

	Product code	Available sizes	Additional info/parts
	**CKD**	(Ref: D81)	position checking tool - **0°**
	**CKD - 15°**	(Ref: D8115)	position checking tool - **15°**
	**CKD - 25°**	(Ref: D8125)	position checking tool - **25°**
	**CKD - 35°**	(Ref: D8135)	position checking tool - **35°**
	**CKD - 45°**	(Ref: D8145)	position checking tool - **45°**

The CKD checking kits are compatible with both Hexagonal 3.75 and Conical platforms.

INDIVIDUAL ABUTMENTS //

	Product code	Available sizes	Additional info/parts
	**S1PNH - 3.75** Abutment for casting	11 mm (Ref: M82)	Two screws included * : 
	**S1PN - 3.75** Abutment for casting	11 mm (Ref: M81)	Two screws included * : 
	**S1PT - 3.75** Abutment for casting	11 mm (Ref: M83)	Two screws included * : ! *Plastic/Titanium* 
	**S1PC - 3.75** Abutment for casting	11 mm (Ref: M84)	Two screws included * : ! *Plastic/Chrome-cobalt* 
	**S1PCH - 3.75** Abutment for casting	11 mm (Ref: M85)	Two screws included * : ! *Plastic/Chrome-cobalt* 

Recommended tightening torque max. 25 Ncm for the screw.
* Blue screw for the final restoration, silver screw is suitable for the laboratory.

FLAT CONNECTION //

Additional info/parts	Available sizes	Product code	
Screw included * : ! *Titanium* 	15 mm (Ref: M28) **FLAT** NEW	**S15 - T - 3.75** Abutment for immediate loading	



Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

TEMPORARY RESTORATION //

Additional info/parts	Available sizes	Product code	
Screw included * : ! *Titanium* 	15 mm (Ref: M29) NEW	**S15 - TH - 3.75** Abutment for immediate loading	

Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

STRAIGHT ABUTMENTS //

Additional info/parts	Available sizes	Product code	
Two screws included * : 	5 mm (Ref: M115) 7 mm (Ref: M117) 9 mm (Ref: M119) 12 mm (Ref: M1112) 15 mm (Ref: M1115)	**S1 - 3.75** Straight abutment	 H
Two screws included * : 	1 mm (Ref: M121) 2 mm (Ref: M122) 3 mm (Ref: M123) 4 mm (Ref: M124)	**S1A - 3.75** Anatomic straight abutment	 H
NARROW Two screws included * : 	7 mm (Ref: M11N7) 9 mm (Ref: M11N9)	**S1N - 3.75** Straight narrow abutment	 H
WIDE Two screws included * : 	9 mm (Ref: M11W9) 12 mm (Ref: M11W12)	**S1W - 3.75** Straight wide abutment	 H
WIDE Two screws included * : 	10 mm (Ref: M11WW10)	**S1W8 - 3.75** Straight wide abutment	

Recommended tightening torque max. 25 Ncm for the screw.
* Blue screw for the final restoration, silver screw is suitable for the laboratory.

ANGULAR ABUTMENTS //

	Product code	Available sizes	Additional info/parts
	**S2 - 3.75, 15°** Angular abutment	11 mm (Ref: M131511)	Two screws included * : 
	**S2L - 3.75, 15°** Angular abutment	15 mm (Ref: M131515)	LONG Two screws included * : 
	**S2S - 3.75, 15°** Angular abutment	15 mm (Ref: M141515)	SLIM Two screws included * : 
	**S2 - 3.75, 25°** Angular abutment	11 mm (Ref: M132511)	Two screws included * : 
	**S2L - 3.75, 25°** Angular abutment	15 mm (Ref: M132515)	LONG Two screws included * : 
	**S2S - 3.75, 25°** Angular abutment	15 mm (Ref: M142515)	SLIM Two screws included * : 
	**S2 - 3.75, 35°** Angular abutment	13 mm (Ref: M133511)	Two screws included * : 
	**S2 - 3.75, 45°** Angular abutment	13 mm (Ref: M134511)	Two screws included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Blue screw for the final restoration, silver screw is suitable for the laboratory.

ANATOMIC ANGULAR ABUTMENTS //

	Product code	Available sizes	Additional info/parts
	**S2A - 3.75, 15°** Anatomic angular abutment	1 mm (Ref: M15151) 2 mm (Ref: M15152) 3 mm (Ref: M15153) 4 mm (Ref: M15154)	Two screws included * : 
	**S2A - 3.75, 25°** Anatomic angular abutment	1 mm (Ref: M15251) 2 mm (Ref: M15252) 3 mm (Ref: M15253) 4 mm (Ref: M15254)	Two screws included * : 

Recommended tightening torque max. 25 Ncm for the screw.
* Blue screw for the final restoration, silver screw is suitable for the laboratory.

WHY CHOOSE SGS DENTAL SYSTEM?

SWISS QUALITY

We use the most precise tools and equipments with the best raw material,that is why SGS became one of market leaders in the dental implant industry.

ZIRCONIUM ABUTMENTS //

Product code	Available sizes	Additional info/parts
S1AZT - 3.75 Zirconium abutment	1 mm (Ref: M161T) 2 mm (Ref: M162T) 3 mm (Ref: M163T)	Screw included *:
S2AZT - 3.75, 15° Zirconium abutment	1 mm (Ref: M17151T) 2 mm (Ref: M17152T) 3 mm (Ref: M17153T)	Screw included *:
S2AZT - 3.75, 25° Zirconium abutment	1 mm (Ref: M17251T) 2 mm (Ref: M17252T) 3 mm (Ref: M17253T)	Screw included *:

Recommended tightening torque max. 25 Ncm for the screw.
* Screw for the final restoration.

TEMPORARY (PEEK) ABUTMENTS //

Product code	Available sizes	Additional info/parts
S1A - Peek - 3.75 Peek abutment	1 mm (Ref: M181) 2 mm (Ref: M182) 3 mm (Ref: M183)	Screw included *:
S2A - Peek - 3.75, 15° Peek abutment	1 mm (Ref: M19151) 2 mm (Ref: M19152) 3 mm (Ref: M19153)	Screw included *:
S2A - Peek - 3.75, 25° Peek abutment	1 mm (Ref: M19251) 2 mm (Ref: M19252) 3 mm (Ref: M19253)	Screw included *:

Recommended tightening torque max. 20 Ncm for the screw.
* Screw for the final restoration.

ABUTMENTS FOR BARS //

Product code	Available sizes	Additional info/parts
S1T - 3.75 Abutment	**Package contains:** plastic without hex 0.5 mm (Ref: M8605) 1.5 mm (Ref: M8615) 2.5 mm (Ref: M8625) 3.5 mm (Ref: M8635)	Optional: plastic with hex

Recommended tightening torque max. 25 Ncm for the screw.

ABUTMENTS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
P-T3 Plastic transfer (Ref: M80)	1 mm (Ref: M791) 2 mm (Ref: M792) 3 mm (Ref: M793) 4 mm (Ref: M794)	**T3 - 3.75** Abutment
PMP-T3 Peek crown Immediate loading (Ref: M80b)		
PM-T3 Plastic crown Immediate loading (Ref: M80a)	1 mm (Ref: M79201) 2 mm (Ref: M79202) 3 mm (Ref: M79203) NEW	**T3 - 3.75, 20°** Abutment

T3-3.75 - Smart Solution: transfer / immediate loading or temporary loading abutment (Contains: 2 x T3, P - , PMP - , PM-T3)

Recommended tightening torque max. 15 Ncm for the screw.

EASY-FIX FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
T1-S4, TP-S4, H - S4, A1 - S4, S4a - Plastic (Ref: C83), S4a - Peek (Ref: C84), T-S4, P-S4	0.5 mm (Ref: M2605) 1.5 mm (Ref: M2615) 2.5 mm (Ref: M2625)	**S4 - 3.75** Abutment
	1 mm (Ref: M32171/C43) 2 mm (Ref: M32172/C43) 3 mm (Ref: M32173/C43)	**S4 - S7 - 3.75, 17°** Abutment
	1 mm (Ref: M32301/C43) 2 mm (Ref: M32302/C43) 3 mm (Ref: M32303/C43)	**S4 - S7 - 3.75, 30°** Abutment

Recommended tightening torque max. 15 Ncm for the screw.

MULTI-UNITS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
T1 - S6/S7 (Ref: C34), A1 - S6/S7 (Ref: C35), H - S6/S7 (Ref: C33), T - S6/S7 (Ref: C36), PH - S6/S7 (Ref: C37), P - S6/S7 (Ref: C38)	0.5 mm (Ref: M3105) 1.5 mm (Ref: M3115) 2.5 mm (Ref: M3125) 3.5 mm (Ref: M3135)	**S6 - 3.75** Straight multi-unit abutment
	1 mm (Ref: M32101/C40) 2 mm (Ref: M32102/C40)	**S7 - 3.75, 10°** Multi-base angular abutment
	1 mm (Ref: M32171/C40) 2 mm (Ref: M32172/C40) 3 mm (Ref: M32173/C40)	**S7 - 3.75, 17°** Multi-base angular abutment
	1 mm (Ref: M32301/C40) 2 mm (Ref: M32302/C40) 3 mm (Ref: M32303/C40)	**S7 - 3.75, 30°** Multi-base angular abutment

Recommended tightening torque max. 20 Ncm for the screw.


THE-ONE MULTI-UNIT ABUTMENTS //

Product code	Available sizes	Additional info/parts




S16S - 3.75
Multi-unit abutment

1 mm (Ref: M641)
2 mm (Ref: M642)
3 mm (Ref: M643)
4 mm (Ref: M644)
5 mm (Ref: M645)




S17S - 3.75, 17°
Multi-unit abutment

1 mm (Ref: M65171)
2 mm (Ref: M65172)
3 mm (Ref: M65173)
4 mm (Ref: M65174)
5 mm (Ref: M65175)



S17S - 3.75, 30°
Multi-unit abutment

1 mm (Ref: M65301)
2 mm (Ref: M65302)
3 mm (Ref: M65303)
4 mm (Ref: M65304)
5 mm (Ref: M65305)



S17S - 3.75, 45°
Multi-unit abutment

1 mm (Ref: M65451)
2 mm (Ref: M65452)
3 mm (Ref: M65453)
4 mm (Ref: M65454)
5 mm (Ref: M65455)

Closed tray



T3 - S16S/S17S
(Ref: C72)



H - S16S/S17S
(Ref: C66)

Open tray



T1 - S16S/S17S
(Ref: C76)



A1 - S16S/S17S
(Ref: C68)



T - S16S/S17S
(Ref: C69)
(Ref: C95)



TW - S16S/S17S
(Ref: C73)

P - S16S/S17S
(Ref: C71)

PH - S16S/S17S
(Ref: C85)

Recommended tightening torque max. 20 Ncm for the screw. !


OVERDENTURE - BALL ATTACHMENTS //

Product code	Available sizes	Additional info/parts



S3 - 3.75
Ball-attachment

1 mm (Ref: M201)
2 mm (Ref: M202)
3 mm (Ref: M203)
4 mm (Ref: M204)
5 mm (Ref: M205)
6 mm (Ref: M206)




S3 - 3.75 Package contains:
Metal cap (Ref: C21)
Standard silicone (Ref:C23)
Protective Disk (Ref: C122)



S3 - S7 - 3.75, - 17°
Ball-attachment


1 mm (Ref: M32171/C4205)
2 mm (Ref: M32172/C4205)
3 mm (Ref: M32173/C4205)



S3-S7 - 3.75 Package contains:
Metal cap (Ref: C21)
Standard silicone (Ref:C23)
Protective Disk (Ref: C122)



Ball 0.5mm (Ref: C4205)



S3 - S7 - 3.75, - 30°
Ball-attachment

1 mm (Ref: M32301/C4205)
2 mm (Ref: M32302/C4205)
3 mm (Ref: M32303/C4205)



Optional:
Hard silicone (Ref: C22)
Standard silicone (Ref: C23)
Soft silicone (Ref: C24)



Ball 1mm (Ref: C421)
Ball 2mm (Ref: C422)



Transfer
T1-S3
(Ref: C27)



Analog
A1-S3
(Ref: C60)

Recommended tightening torque max. 25 Ncm for the screw. !

OVERDENTURE S-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code



Package contains:
Metal cap (Ref: C116)
Laboratory (Ref: C117)
Extra soft (Ref: C118)
Soft (Ref: C119)
Standard (Ref: C120)
Strong (Ref: C121)
Protective Disk (Ref: C122)

Optional:



Transfer
T1-S35
(Ref: C114)




Analog
A1-S35
(Ref: C115)

K21 Hand tool
(Ref: B21)


1 mm (Ref: M1121)
2 mm (Ref: M1122)
3 mm (Ref: M1123)
4 mm (Ref: M1124)
5 mm (Ref: M1125)
6 mm (Ref: M1126)

S35 - 3.75
Abutment



1 mm (Ref: M32171/C113)
2 mm (Ref: M32172/C113)
3 mm (Ref: M32173/C113)

S35 - S7 - 3.75, 17°
Abutment



1 mm (Ref: M32301/C113)
2 mm (Ref: M32302/C113)
3 mm (Ref: M32303/C113)

S35 - S7 - 3.75, 30°
Abutment



! **Recommended tightening torque max. 20 Ncm for the screw.**

OVERDENTURE SMART-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code



K4
(Ref: C56)



Transfer
T1-S8
(Ref: C48)



Straight package:
Metal cap (Ref: C50)
Laboratory (Ref: C54)
Hard (Ref: C51)
Medium (Ref: C52)
Soft (Ref: C53)
Protective Disk (Ref: C122)



Analog
A1-S8
(Ref: C49)




Magic Tool
(Ref: C55)



Angular package:
Metal cap (Ref: C50)
Laboratory (Ref: C54)
Hard (Ref: C51b)
Medium (Ref: C52)
Soft (Ref: C53)
Protective Disk (Ref: C122)


1 mm (Ref: M451)
2 mm (Ref: M452)
3 mm (Ref: M453)
4 mm (Ref: M454)
5 mm (Ref: M455)
6 mm (Ref: M456)

S8 - 3.75
Abutment



1.5 mm (Ref: M461515)
3 mm (Ref: M46153)


S8 - 3.75, 15°
Abutment



! **Recommended tightening torque max. 20 Ncm for the screw.**

OVERDENTURE EASY-FIX ABUTMENTS //


Additional info/parts	Available sizes	Product code




Straight package:
Metal cap (Ref: C50)
Laboratory (Ref: C54)
Medium (Ref: C52)
Protective Disk (Ref: C122)

1 mm (Ref: M571)
2 mm (Ref: M572)
3 mm (Ref: M573)
4 mm (Ref: M574)
5 mm (Ref: M575)
6 mm (Ref: M576)

S5 - 3.75
Abutment





Angular package:
Metal cap (Ref: C50)
Laboratory (Ref: C54)
Hard (Ref: C51b)
Soft (Ref: C53)
Protective Disk (Ref: C122)

1 mm (Ref: M32171/C441)
2 mm (Ref: M32172/C441)
3 mm (Ref: M32173/C441)

S5 - S7 - 3.75, 17°
Abutment

S5 - S7
1 mm (Ref: C441)
2 mm (Ref: C442)

Optional:

Transfer
T1-S5
(Ref: C58)

Analog
A1-S5
(Ref: C59)

1 mm (Ref: M32301/C441)
2 mm (Ref: M32302/C441)
3 mm (Ref: M32303/C441)

S5 - S7 - 3.75, 30°
Abutment

! **Recommended tightening torque max. 20 Ncm for the screw.**

HEALING CAP //

Product code	Additional info/parts
H-S4 Healing cap	–

TRANSFERS //

Product code	Additional info/parts
T1-S4 Transfer	! *Open tray*
TP-S4 Plastic	! *Closed tray*

ANALOG //

Product code	Additional info/parts
A1 - S4 Analog	–

ABUTMENTS //

Product code	Additional info/parts
S4a-Plastic	*Temporary click-on abutment*
S4a-Peek	*Temporary click-on abutment (long-term)*
T-S4	○ ⬡ *Immediate loading titanium sleeve*
P-S4	○ ⬡ *Immediate loading plastic sleeve/casting*

KEYS/DRIVERS //

Product code	Available sizes	Additional info/parts
K6	16 mm (Ref: ORB06)	–

WHY CHOOSE SGS DENTAL SYSTEM?

FRIENDLY SUPPORT

We at SGS Dental Implant System strive to do all our best for our partners: high-quality service, flexibility, intention to help anytime. Give the best support they desire.

CONICAL PLATFORM (P5D, P5G, P1D, P7D) //

Scanning Abutment



SPCSD
(Ref: D107S)

For lab use and intra-oral

Digital analog



A1D - Digital
(Ref: D112S)

Titanium Base

Single tooth	Bridges/bars



STCSD with hex
0.35 mm (Ref: D108S035)
1.5 mm (Ref: D108S15)
2.5 mm (Ref: D108S25)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCSD without hex
0.35 mm (Ref: D109S035)
1.5 mm (Ref: D109S15)
2.5 mm (Ref: D109S25)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Titanium Base

Sirona titanium base	ZirkonZahn titanium base



CS-STCD with hex
0.35 mm (Ref: D110S05)
1.5 mm (Ref: D110S15)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



CZ-STCD with hex
0.35 mm (Ref: D111S035)

Intended to be used for custom casting prosthetic restorations only on multiple implants

NARROW CONICAL PLATFORM (P7N) //

Scanning Abutment



SPCN - 2.1
(Ref: N107)

For lab use and intra-oral


Digital analog



A1N - Digital
(Ref: N112)

Titanium Base

Single tooth	Bridges/bars



STCN - 2.1 with hex
0.35 mm (Ref: N108)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCNN - 2.1 without hex
0.35 mm (Ref: N109)

Intended to be used for custom casting prosthetic restorations only on multiple implants

PLATFORM 3.75 (P1, P7) //

Scanning Abutment



SPCS - 3.75
(Ref: M107S)

For lab use and intra-oral

Digital analog



A1 - Digital - 3.75
(Ref: M112S)

Titanium Base

Single tooth	Bridges/bars



STCS - 3.75 with hex
0.35 mm (Ref: M108S035)
1.5 mm (Ref: M108S15)
2.5 mm (Ref: M108S25)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCS - 3.75 without hex
0.35 mm (Ref: M109S035)
1.5 mm (Ref: M109S15)
2.5 mm (Ref: M109S25)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Titanium Base

Sirona titanium base	ZirkonZahn titanium base



CS-STC - 3.75 with hex
0.35 mm (Ref: M110S05)
1.5 mm (Ref: M110S15)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



CZ-STC - 3.75 with hex
0.35 mm (Ref: M111S035)

Intended to be used for custom casting prosthetic restorations only on multiple implants

S6-S7 //

Scanning Abutment



SPCS - S6/S7
(Ref: C75)

For lab use and intra-oral

Digital analog



A1 - Digital - S6/S7
(Ref: C112S)

Titanium Base

Single tooth	Bridges/bars



STCS - S6/S7 with hex
(Ref: C77)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCS - S6/S7 without hex
(Ref: C78)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Screw



S1a
S6/S7
(Ref: 120)

Screw for S6-S7

S16S-S17S //

Scanning Abutment



SPCS - S16S/S17S
(Ref: C79)

For lab use and intra-oral

Digital analog



A1 - Digital - S16S/S17S
(Ref: C113S)

Titanium Base

Single tooth	Bridges/bars



STCS - S16S/S17S with hex
(Ref: C81)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCS - S16S/S17S without hex
(Ref: C82)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Screw



S1a
S16S/S17S
(Ref: 130)

Screw for S16S-S17S

S4 //

Scanning Abutment



SPCS - S4
(Ref: C83)

For lab use and intra-oral

Digital analog



A1 - Digital - S4
(Ref: C117S)

Titanium Base

Single tooth	Bridges/bars



STCS - S4 with hex
(Ref: C86)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



STCS - S4 without hex
(Ref: C88)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Screw



S1a
S4
(Ref: 140)

Screw for S4

DYNAMIC ABUTMENT SOLUTIONS


Dynamic cad-cam system

It is used in those cases which are necessary to rectify the entry of the screw due to an unfavorable position of the implants, improving the functionality and aesthetics of the milled prosthesis.

Our screwdriver has a contra-angle connection to make it easier to use with a dynamometer or manual ratchet, with the corresponding adaptors or handles.

The system protects the screw, prevents its breakage when applying an excess of torque, causing the deformation of the screwdriver, before this happens.




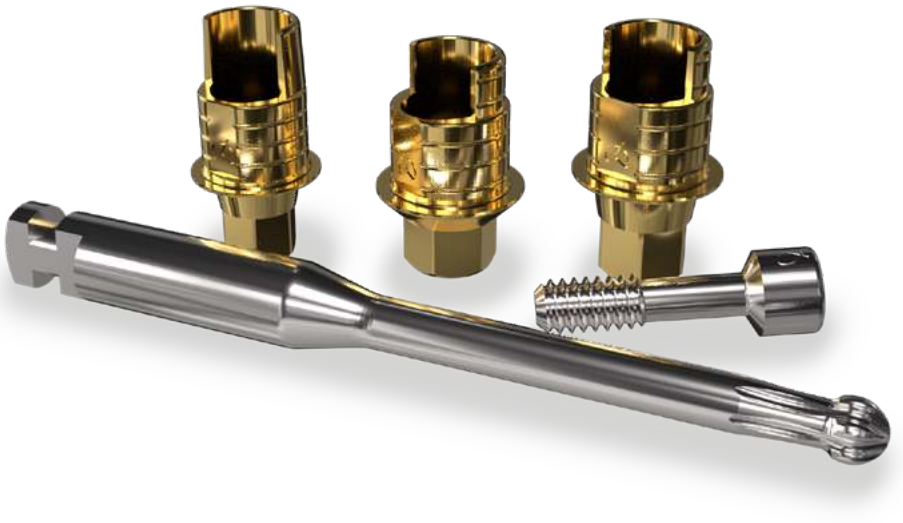

Dynamic Titanium Abutments


CONICAL PLATFORM //

Additional info/parts	Available sizes	Product code
	0.5 mm (Ref: M8605) 1.5 mm (Ref: M8615) 3 mm (Ref: M8635)	**DynTi-baseD** Abutment




NARROW CONICAL PLATFORM //

Additional info/parts	Available sizes	Product code
	0.5 mm (Ref: M8605) 1.5 mm (Ref: M8615)	**DynTi-baseN** Abutment



PLATFORM 3.75 //

Additional info/parts	Available sizes	Product code
	0.5 mm (Ref: M8605) 1.5 mm (Ref: M8615) 3 mm (Ref: M8635)	**DynTi-base 3.75** Abutment



Recommended tightening torque max. 25 Ncm for the screw.

SPECIAL TOOLS //

Additional info/parts	Available sizes	Product code
-	24 mm (Ref: M8605) 32 mm (Ref: M8615)	**Dyn Driver**
Universal Adapter	-	**DRE+**





MILLING ABUTMENT OPTIONS //

Internal Hexagon - Platform 3.75


SIB-3.75-AG
(Ref: M0109)


SIB-3.75-AR
(Ref: M0110)


SIB-3.75-DS
(Ref: M0111)


SIB-3.75-KV
(Ref: M0112)


SIB-3.75-MD11
(Ref: M0113)


SIB-3.75-MD16
(Ref: M0114)


SIB-3.75-ZZ
(Ref: M0115)

Blue screw for the final restoration.



Conical Platform


SIBD-AG
(Ref: D0109)


SIBD-AR
(Ref: D0110)


SIBD-DS
(Ref: D0111)


SIBD-KV
(Ref: D0112)


SIBD-MD11
(Ref: D0113)


SIBD-MD16
(Ref: D0114)


SIBD-ZZ
(Ref: D0115)

Gold screw for the final restoration.



Narrow Conical Platform


SIBN-2.1-AR
(Ref: N0110)


SIBN-2.1-DS
(Ref: N0111)


SIBN-2.1-KV
(Ref: N0112)


SIBN-2.1-MD11
(Ref: N0113)


SIBN-2.1-MD16
(Ref: N0114)


SIBN-2.1-ZZ
(Ref: N0115)

Green screw for the final restoration.







CAD-CAM Softwares supported by SGS products

	CAD-CAM	IMPLANT PLANNING
exocad	✓	✓
ProDigiDent	✓	✓
3shape	✓	✓
BlueSkyBio		✓
Zirkonzahn	✓	
smop powered by swissmeda		✓
dental wings	✓	✓
Dentsply Sirona Implants		✓
AMANNGIRRBACH	✓	
Medialab		✓
		✓
cefla		✓
invivo6		✓
Carestream DENTAL		✓
penguin	Primary Stability Sensors	
OSSTELL A SWEMA COMPANY	Primary Stability Sensors	


SKM

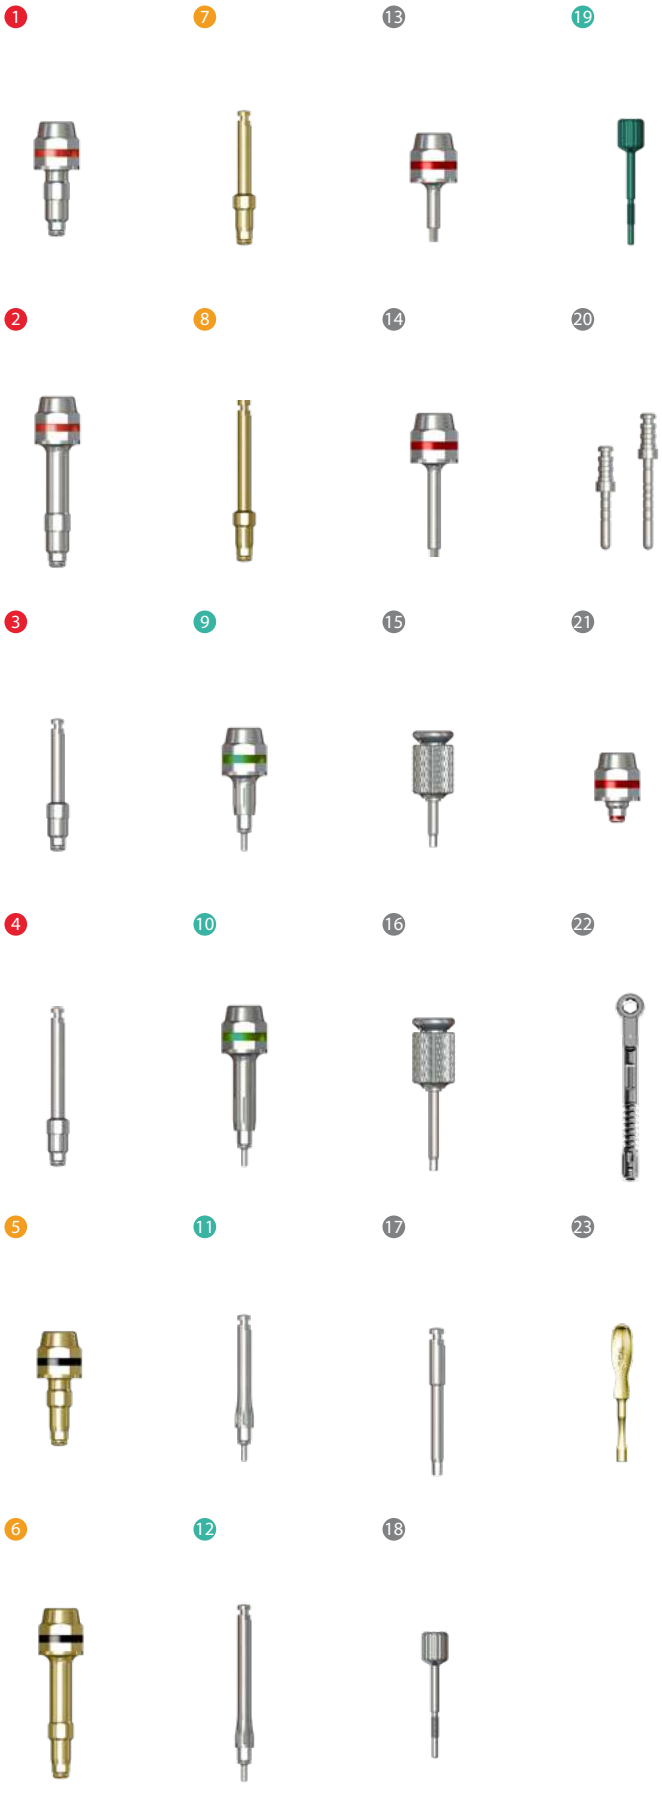

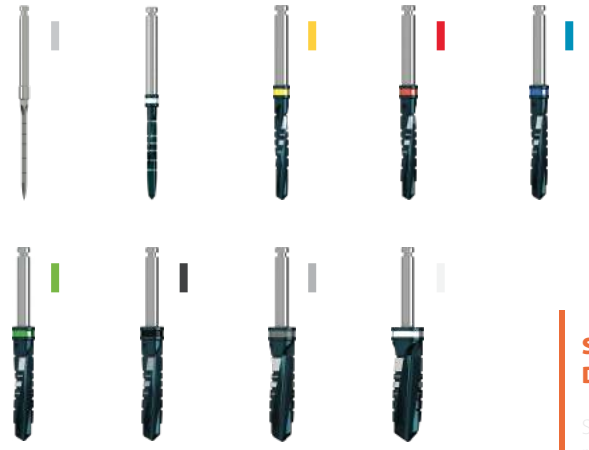


Spiral Drill kit

Surgical drills recommended for bone type D1-D5.

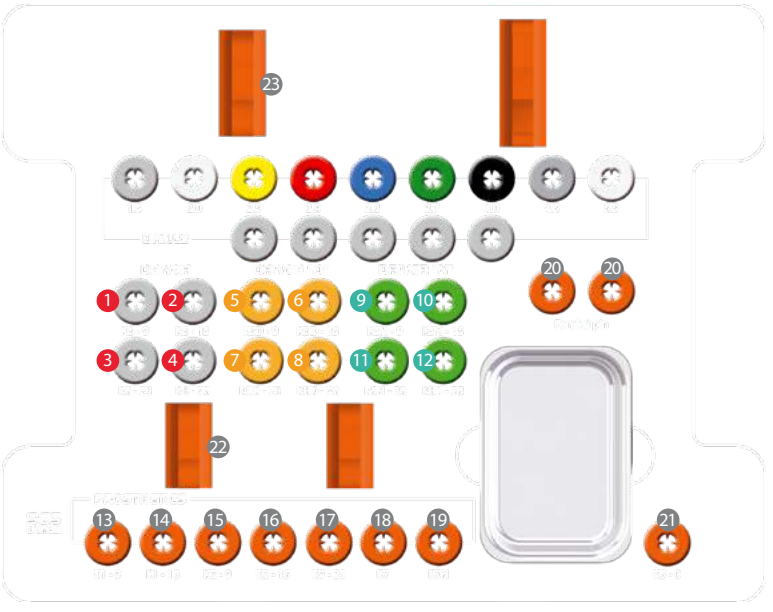

SKM-UP


NEW

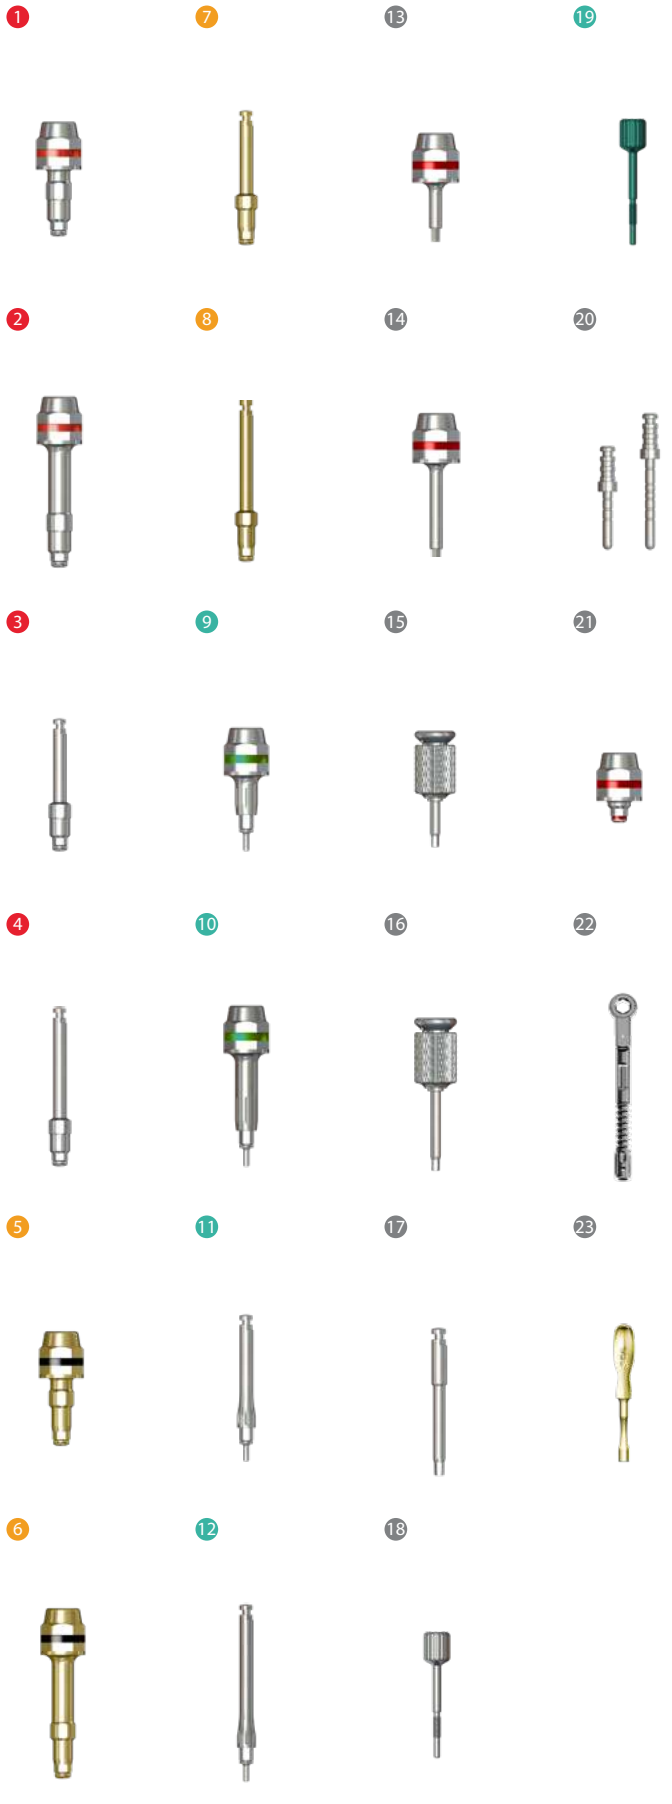




Spiral Drill kit

SGS Dental Developed drills

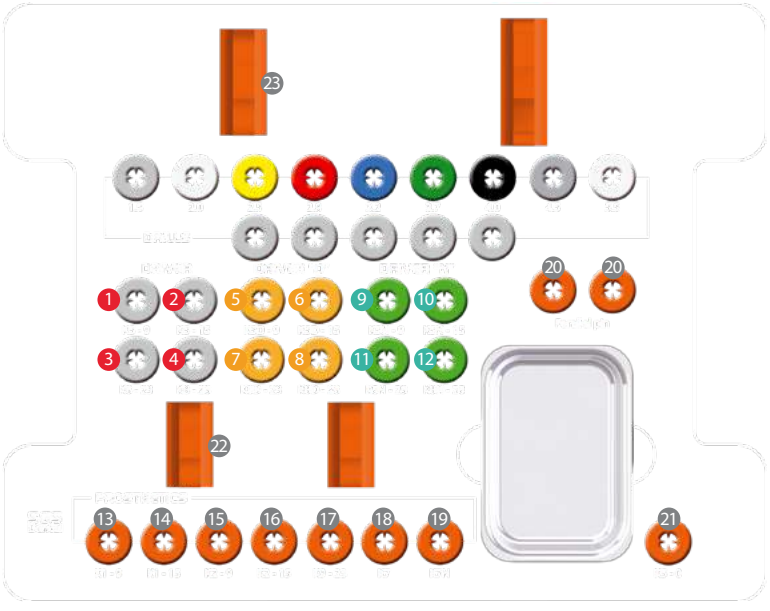




SKM+

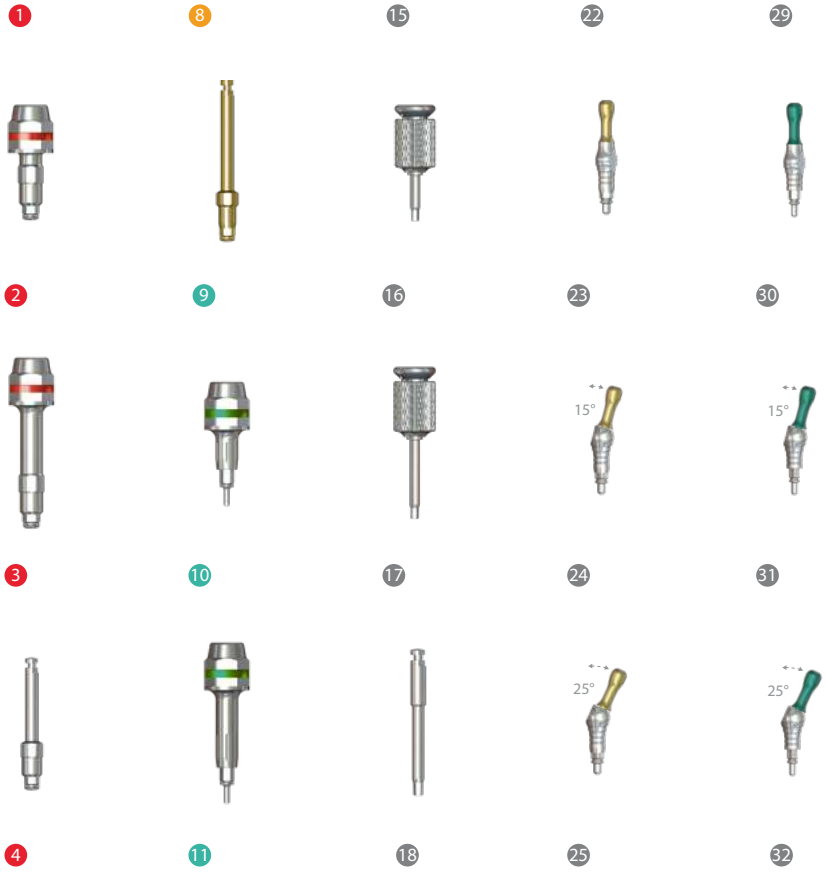





Spiral Drill kit


SGS Dental Developed drills

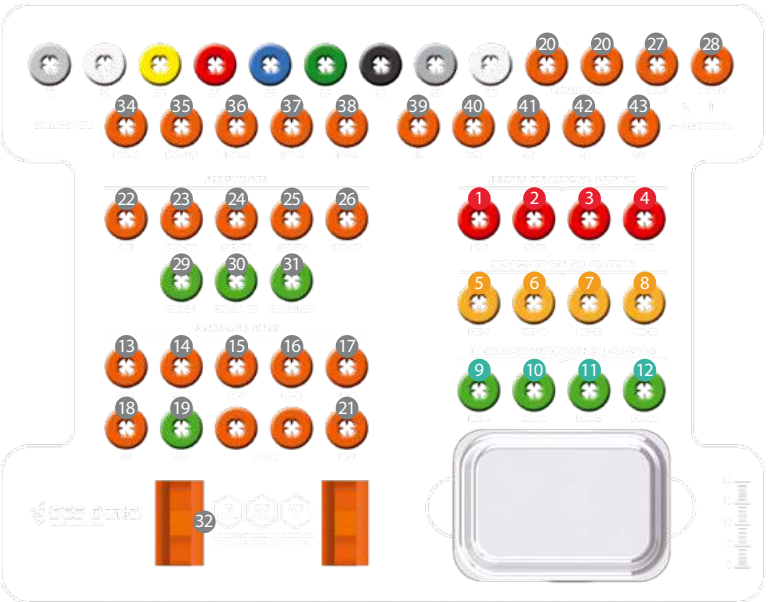

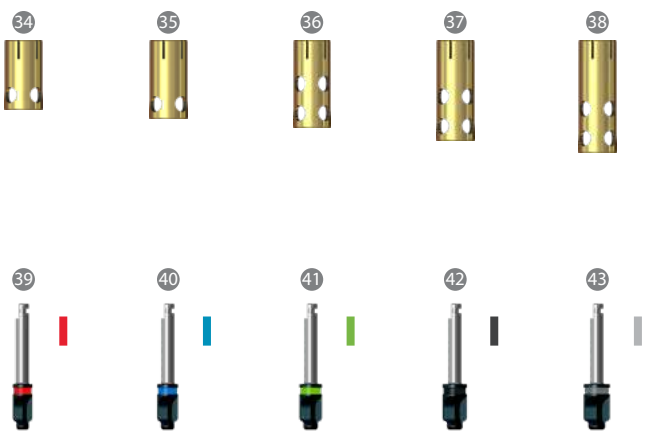

SKG

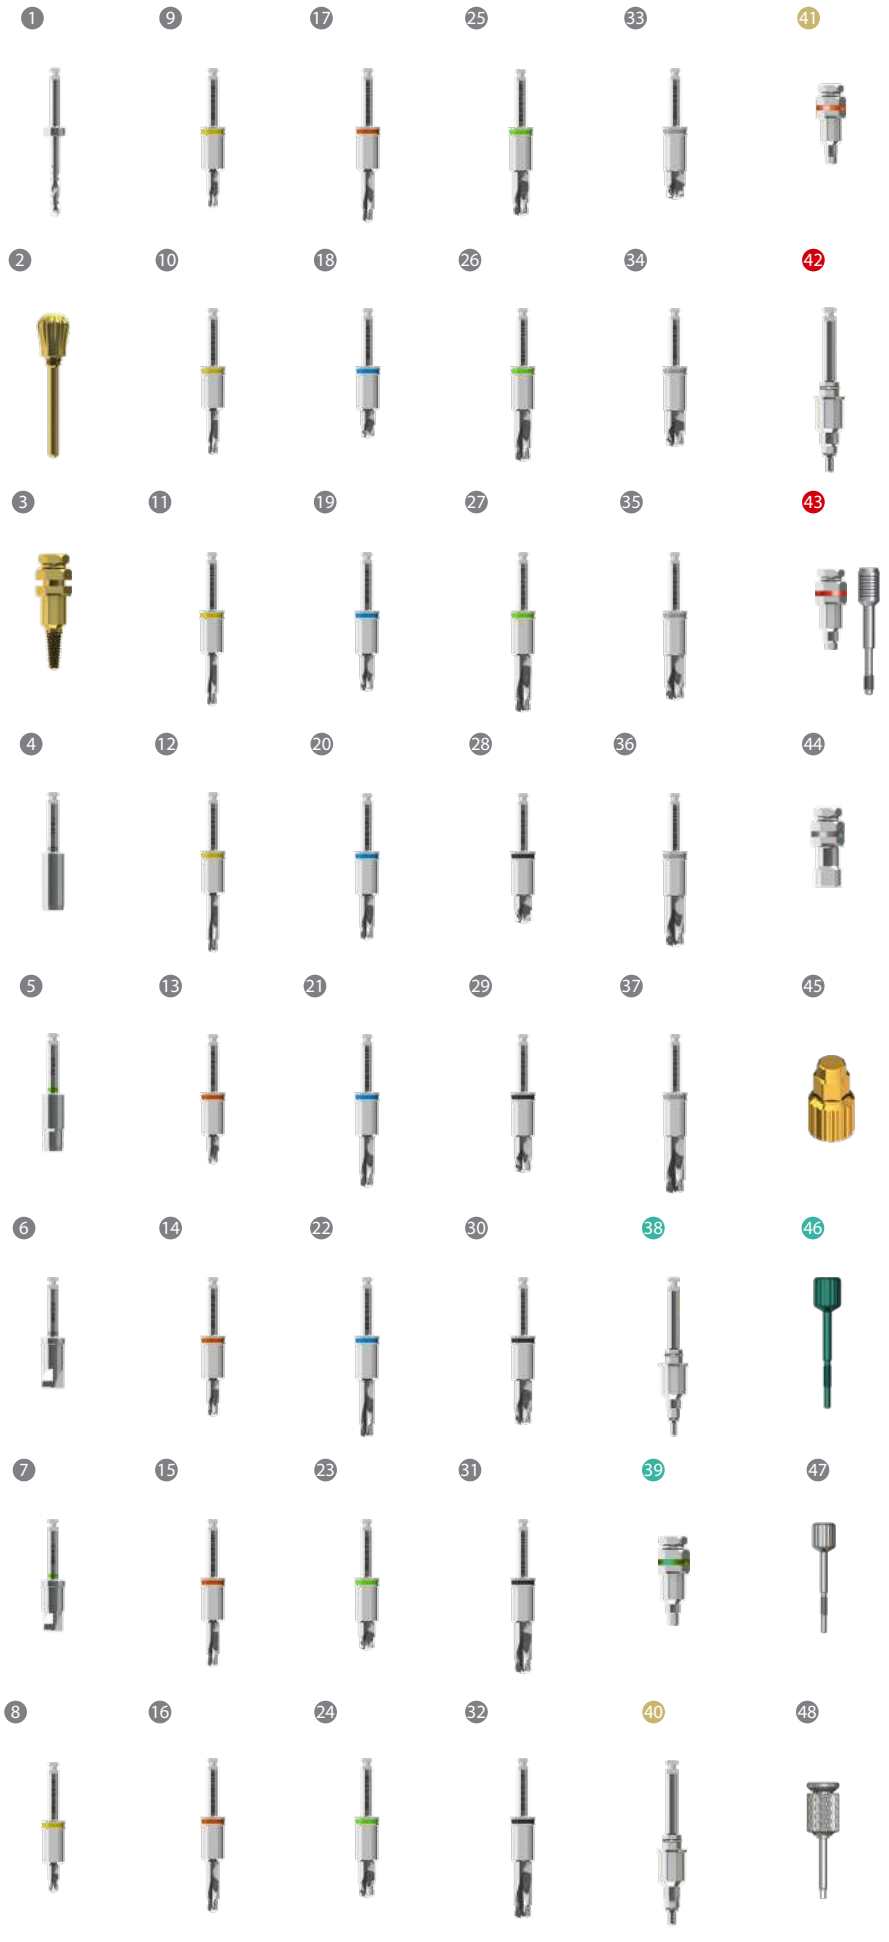
1
9
17
25
33
41
2
10
18
26
34
42
3
11
19
27
35
43
4
12
20
28
36
44
5
13
21
29
37
45
6
14
22
30
38
46
7
15
23
31
39
47
8
16
24
32
40
48

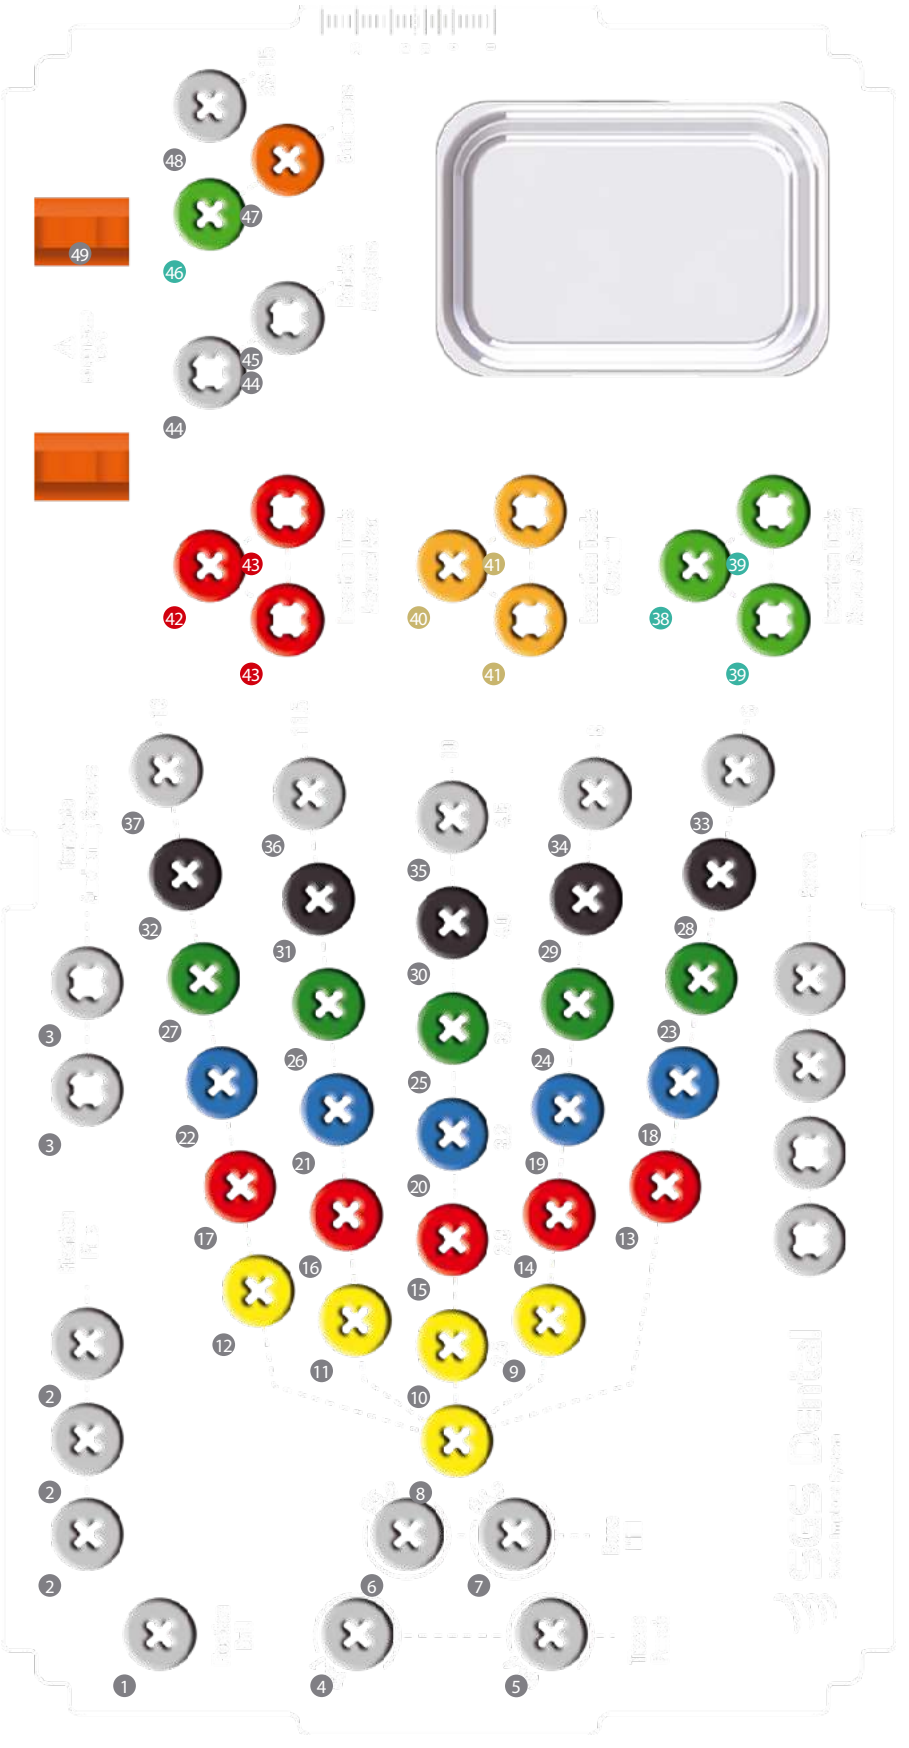
48
47
46
49
45
44
44
43
42
43
41
40
41
39
38
39
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
3
3
2
2
2
2
8
6
7
1
4
5


49


50

SKP

1



2



3



4



5



6



7



8



9



10



11



12



13



14



15



16



17



18










SKD-C

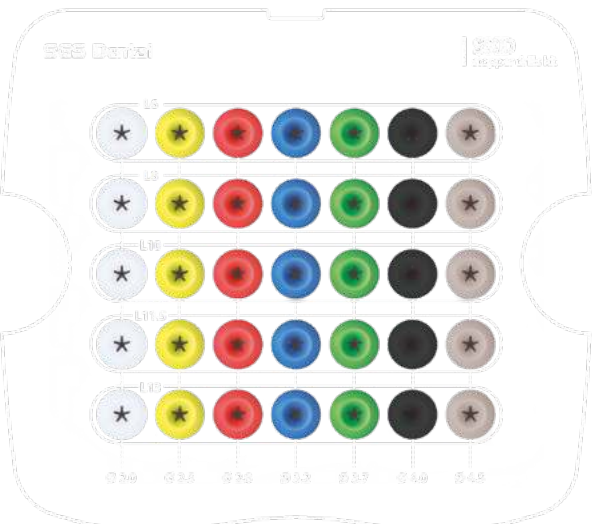



L6 Ø 2.5 Ref. num.: C105256
L6 Ø 2.8 Ref. num.: C105286
L6 Ø 3.2 Ref. num.: C105326
L6 Ø 3.7 Ref. num.: C105376
L6 Ø 4.0 Ref. num.: C105406
L6 Ø 4.5 Ref. num.: C105456



L8 Ø 2.0 Ref. num.: C10128
L8 Ø 2.5 Ref. num.: C105258
L8 Ø 2.8 Ref. num.: C105288
L8 Ø 3.2 Ref. num.: C105328
L8 Ø 3.7 Ref. num.: C105378
L8 Ø 4.0 Ref. num.: C105408
L8 Ø 4.5 Ref. num.: C105458



L10 Ø 2.0 Ref. num.: C101210
L10 Ø 2.5 Ref. num.: C1052510
L10 Ø 2.8 Ref. num.: C1052810
L10 Ø 3.2 Ref. num.: C1053210
L10 Ø 3.7 Ref. num.: C1053710
L10 Ø 4.0 Ref. num.: C1054010
L10 Ø 4.5 Ref. num.: C1054510



L11,5 Ø 2.0 Ref. num.: C101211
L11,5 Ø 2.5 Ref. num.: C1052511
L11,5 Ø 2.8 Ref. num.: C1052811
L11,5 Ø 3.2 Ref. num.: C1053211
L11,5 Ø 3.7 Ref. num.: C1053711
L11,5 Ø 4.0 Ref. num.: C1054011
L11,5 Ø 4.5 Ref. num.: C1054511



L13 Ø 2.0 Ref. num.: C101213
L13 Ø 2.5 Ref. num.: C1052513
L13 Ø 2.8 Ref. num.: C1052813
L13 Ø 3.2 Ref. num.: C1053213
L13 Ø 3.7 Ref. num.: C1053713
L13 Ø 4.0 Ref. num.: C1054013
L13 Ø 4.5 Ref. num.: C1054513



EXTRA DRILLS

Ø 2.5 Ref. num.: C10025
Ø 2.8 Ref. num.: C10028
Ø 3.2 Ref. num.: C10032
Ø 3.7 Ref. num.: C10037
Ø 4.0 Ref. num.: C10040
Ø 4.5 Ref. num.: C10045
Ø 5.5 Ref. num.: C10055



4mm
5mm



SIMPLICITY GUARANTEES SUCCESS

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.

Implantology
SGS Dental

SGS Dental Implant System Holding - Zn
Talhofstrasse 9, CH-9000 St. Gallen, **Switzerland**

FL-9494, Schaan, Landstrasse 27
Liechtenstein
Tel.: 00423 233 5050, 00423 233 5051
Fax: 00423 233 5052

SGS International Kft./Ltd. Worldwide Logistic Center
H-1047 Budapest, Karolyi István u. 1-3.
Tel: +36 1 328 0427
www.sgs-dental.com

SGS Dental
Swiss Implant System